


BUFFER VESSELS

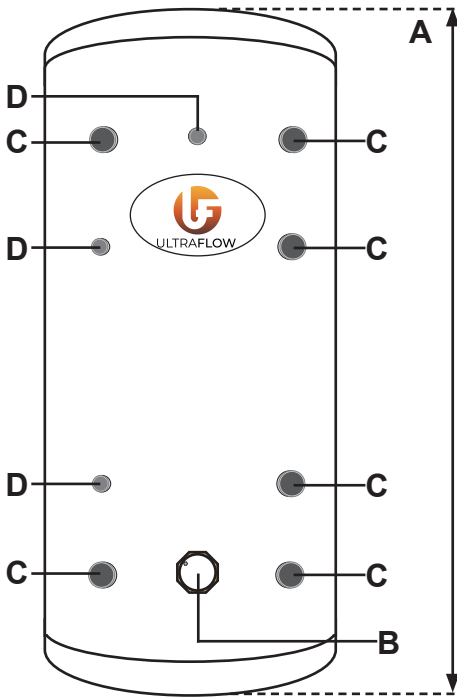

Our buffer vessel range is made from duplex stainless steel for longevity, and is offered with a 7-year warranty for peace of mind, as well as being cased and foamed using the same top-of-the-range insulating foam as the rest of the Ultraflow range.


Our floor-standing 50L slim buffer vessel found in the table below, has 5x 1" connections including air release at the top dome.

3x 22mm stat pockets allow for consistent temperature monitoring and maximise system efficiency.

All stainless buffer vessels are available in slimline 475mm diameter up to 200L on request


FLOOR STANDING

	Slim 475mm	Standard Diameter - 545mm							690mm Cylinders		
Product Code	UDS50BUFF	UD90BUFF	UD120BUFF	UD150BUFF	UD170BUFF	UD200BUFF	UD250BUFF	UD300BUFF	UD400BUFF	UD500BUFF	
Capacity (L)	50	90	120	150	170	200	250	300	400	500	
Height	A	727	727	915	1100	1224	1414	1722	1975	1580	1910
Immersion	B	210	210	210	210	210	210	210	210	270	270
1" in/out	C	190	190	190	190	190	190	190	190	295	295
1" in/out	C	190	190	190	190	190	190	190	190	395	395
1" in/out	C	471	471	325	380	380	380	380	380	485	485
1" in/out	C	471	471	513	596	724	910	1222	1445	465	465
1" in/out	C	N/A	N/A	659	846	974	1160	1472	1695	1226	1567
1" in/out	C	N/A	N/A	659	846	974	1160	1472	1695	1326	1667
Control Stat	D	325	325	325	420	420	420	420	420	465	465
Control Stat	D	325	325	513	646	774	960	1272	1495	1226	1567
Control Stat	D	471	471	659	846	974	1160	1472	1695	1326	1667

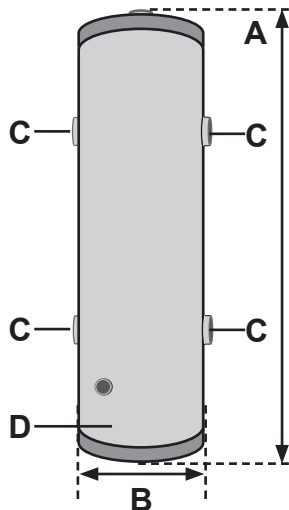

WALLMOUNT/FLOOR STAND

Product Code	UDS25/WALL	UDS50/WALL	
Capacity (L)	25	50	
Height	A	848	825
Diameter	B	254	338
1" in/out	C	125	125
1" in/out	C	125	125
1" in/out	C	713	700
1" in/out	C	713	700
Drain Off	D	70	70
1" wall mount	-	225	225
1" wall mount	-	626	625

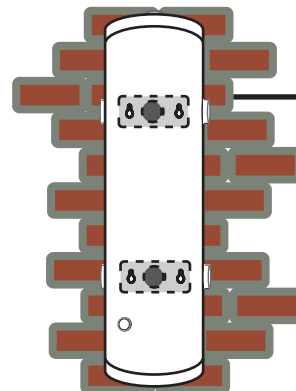

Our wall-hung vessels come supplied with 2 mounting brackets. These connect to the buffer via 1" female blanks at the rear of the tank, making for safe, secure mounting onto any wall strong enough to bear the weight of the vessel when full.