


DIRECT CYLINDERS

DIRECT

Standard Diameter - 545mm								
Product Code		UD90	UD120	UD150	UD170	UD200	UD250	UD300
Capacity (L)		90	120	150	170	200	250	300
Height	A	727	915	1100	1224	1414	1722	1975
Cold Inlet	B	180	180	180	180	180	180	180
Immersion	C	200	200	200	200	200	200	200
Immersion	C	N/A	504	604	704	804	944	1094
T&P Valve	D	500	688	875	1009	1195	1507	1724
Sec. Return	E	N/A	N/A	N/A	N/A	1090	1386	1605

Slimline Diameter - 475mm							
Product Code		UDS60	UDS90	UDS120	UDS150	UDS170	UDS200
Capacity (L)		60	90	120	150	170	200
Height	A	714	977	1240	1505	1680	1950
Cold Inlet	B	174	174	174	174	174	174
Immersion	C	194	194	194	194	194	194
Immersion	C	N/A	604	714	790	893	1093
T&P Valve	D	501	788	1035	1303	1481	1748

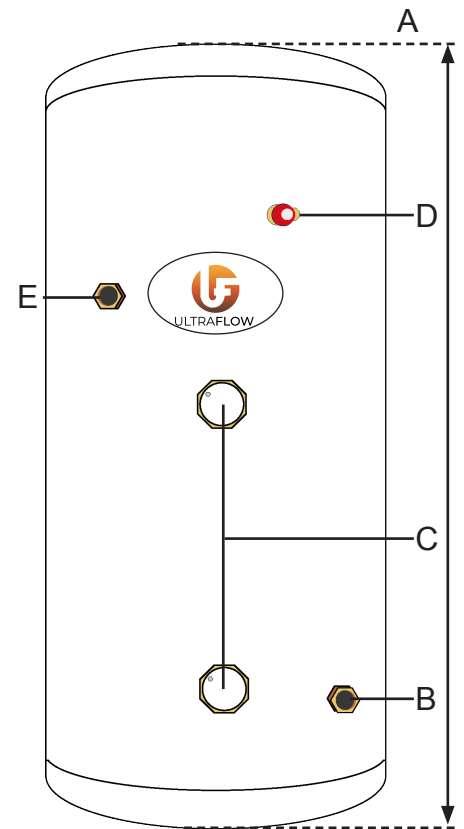

Connection Sizes

3/4" Comp.	Hot Draw, Cold Feed, Sec. Return, Coil Conns.
1 3/4" F	Immersion
1/2" F	T&P Relief Valve

Please note: These tapping heights are subject to change, and are to be used as a guideline only