


HEAT PUMP PRE PLUMB

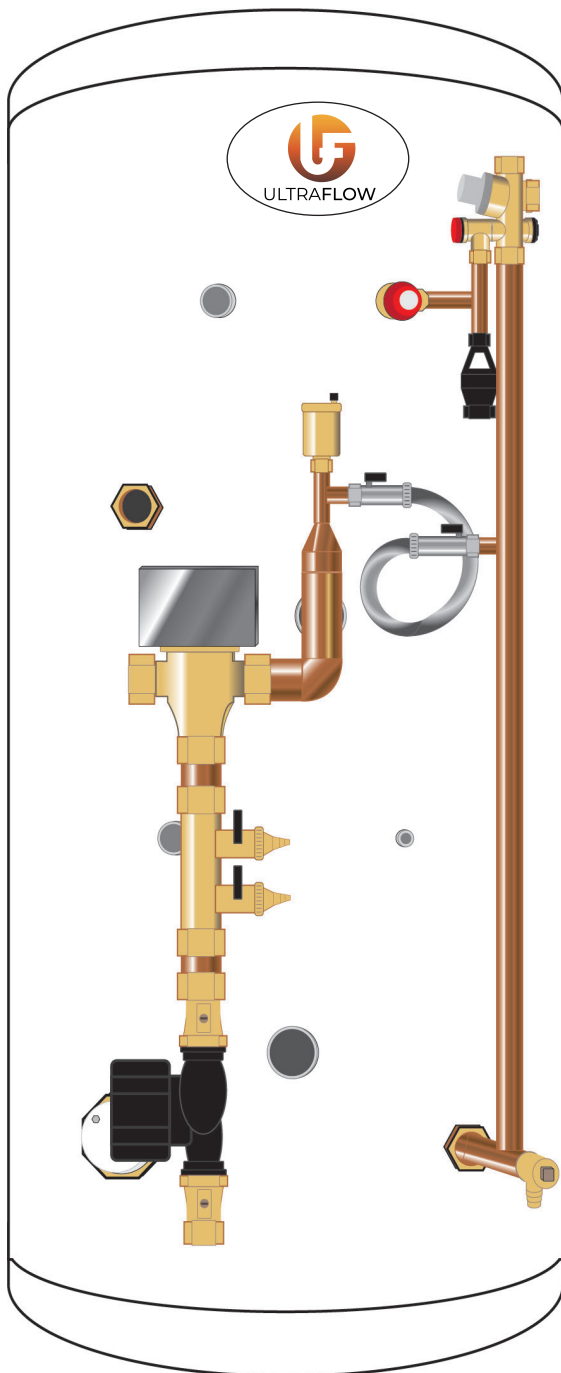

Model shown here comes with pump.

Available in with-pump and without-pump options.

Our range of standard heat pump cylinders are available in a pre plumbed format, incorporating several useful unvented components that will aid in the installation and maintenance of your heat pump system.

The heat pump pre plumb range has been designed with universal installations in mind, making use of intuitive components to suit any application.

Standard Diameter - 545mm					
Product Code	UIP150-HP	UIP170-HP	UIP200-HP	UIP250-HP	UIP300-HP
Capacity (L)	150	170	200	250	300

Slimline Diameter - 475mm				
Product Code	UIPS120-HP	UIPS150-HP	UIPS170-HP	UIPS-200 HP
Capacity (L)	120	150	170	200

After installation, please insulate all external pipework to avoid unnecessary heat losses.

The heat pump pre plumb cylinders in 475mm and 545mm diameter come provided with a 3-port full diverting valve, remote filling loop with pressure gauge, and fill & flush valve for glycol-based applications.

See page 16 for physical examples of these kit parts.

3-PORT DIVERTER SETUP

The below setup is utilised on our pre plumb cylinders, to enable the 3-port full diverting valve and hot water tank to meet G3 building regulations and requirements

