


HEAT PUMP CYLINDERS

HEAT PUMP STANDARD INDIRECT

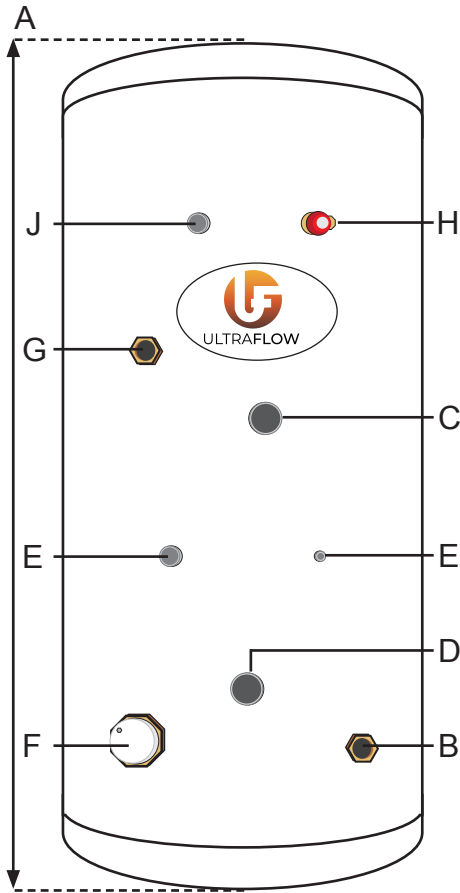

Standard Diameter - 545mm						690mm Cylinders	
Product Code	UI150-HP	UI170-HP	UI200-HP	UI250-HP	UI300-HP	UI400-HP	UI500-HP
Capacity (L)	150	170	200	250	300	400	500
Height	A	1100	1224	1414	1722	1580	1910
Cold Inlet	B	180	180	180	180	270	270
Heating Flow	C	660	660	865	865	845	845
Return	D	250	250	250	250	380	380
Control Stat	E	457.5	457.5	465	465	460	460
Immersion	F	190	190	190	190	280	280
Sec. Return	G	N/A	N/A	1043	1384	1121	1462
T&P Valve	H	881	1009	1195	1507	1326	1667
High Limit Stat	J	881	1009	1195	1507	1326	1667

Connection Sizes

3/4" Comp.	Hot Draw, Cold Feed, Sec. Return
1" F	Heating Flow, Heating Return
1 3/4" F	Immersion
1/2" F	T&P Relief Valve

Please note, that 690mm calorifiers come with 1" hot outlet and cold feed, and a second immersion heater as standard.


Please note: These tapping heights are subject to change, and are to be used as a guideline only

HEAT PUMP SLIM INDIRECT

Slimline Diameter - 475mm				
Product Code	UIS120-HP	UIS150-HP	UIS170-HP	UIS200-HP
Capacity (L)	120	150	170	200
Height	A	1240	1505	1680
Cold Inlet	B	174	174	174
Heating Flow	C	184	184	184
Return	D	244	244	244
Control Stat	E	540	540	537
Immersion	F	184	184	184
High Limit Stat	G	1038	1306	1484
T&P Valve	H	1038	1306	1484

Connection Sizes

3/4" Comp.	Hot Draw, Cold Feed
1" F	Heating Flow, Heating Return
1 3/4" F	Immersion
1/2" F	T&P Relief Valve

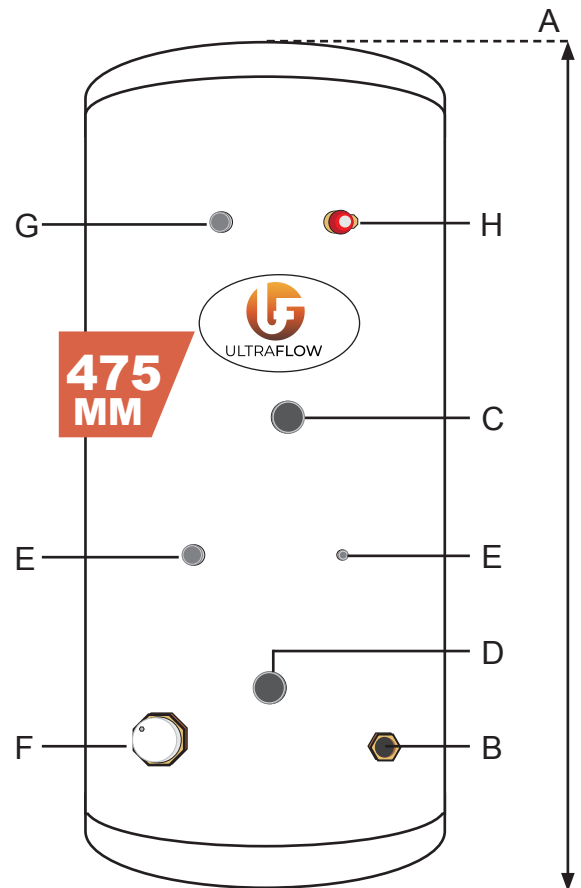

Please note: These tapping heights are subject to change, and are to be used as a guideline only