


INDIRECT SOLAR TWIN COIL CYLINDERS

A

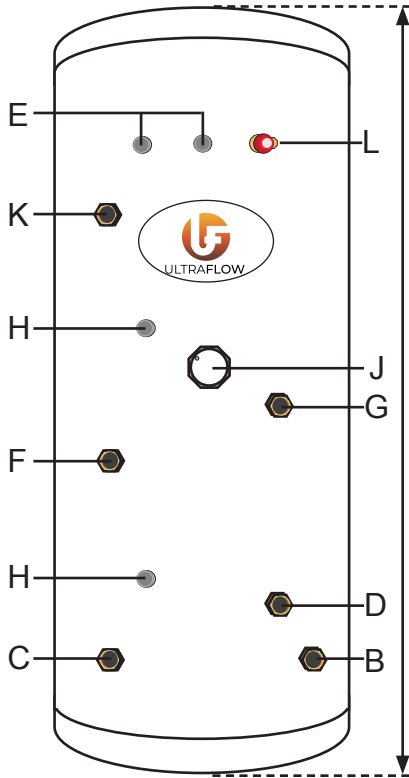

INDIRECT SOLAR TWIN COIL

Standard Diameter - 545mm					Slim Diameter - 475mm		
Product Code	UWI170	UWI200	UWI250	UWI300	UWIS150	UWIS170	UWIS200
Capacity (L)	170	200	250	300	150	170	200
Height	A	1224	1414	1722	1505	1680	1950
Cold Inlet	B	180	180	180	174	174	174
Solar Coil Flow	C	200	200	200	199	199	199
Solar Coil Return	D	240	240	240	239	239	239
High Limit Stat	E	1009	1195	1507	1724	1306	1484
Top Coil Flow	F	584	637	711	781	641	708
Top Coil Return	G	704	757	831	901	721	788
Control Stat	H	295	295	295	295	269	269
Control Stat	H	694	827	901	971	791	856
Immersion	J	674	807	881	951	771	836
Sec. Return	K	N/A	N/A	1384	1557	N/A	N/A
T&P Valve	L	1009	1195	1507	1724	1306	1484

Connection Sizes

3/4" Comp.	Hot Draw, Cold Feed, Sec. Return, Solar Coil
1" F	HP Flow, HP Return
1 3/4" F	Immersion
1/2" F	T&P Relief Valve

Please note: These tapping heights are subject to change, and are to be used as a guideline only