


INDIRECT CYLINDERS

INDIRECT

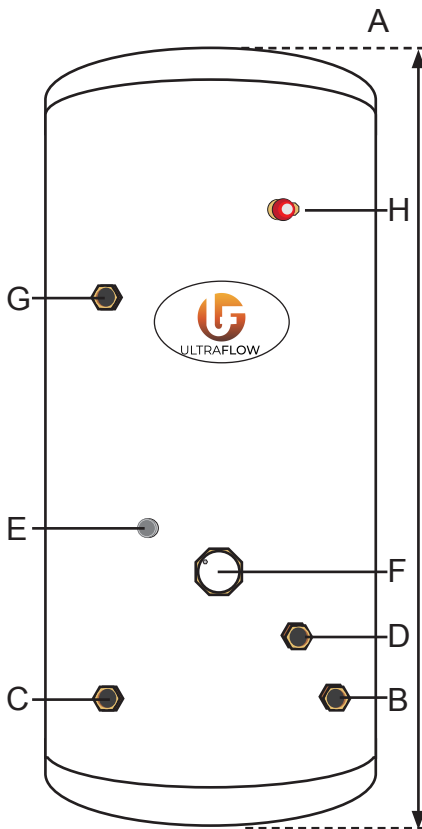

Standard Diameter - 545mm								690mm Cylinders	
Product Code	UI90	UI120	UI150	UI170	UI200	UI250	UI300	UI400	UI500
Capacity (L)	90	120	150	170	200	250	300	400	500
Height	A	727	915	1100	1224	1414	1722	1580	1910
Cold Inlet	B	180	180	180	180	180	180	270	270
Heating Flow	C	180	180	180	180	186	201	295	295
Return	D	220	220	300	300	300	361	395	395
Control Stat	E	340	340	420	420	420	481	485	485
Immersion	F	270	270	350	350	350	411	465	465
Sec. Return	G	N/A	N/A	N/A	N/A	1090	1386	1226	1567
T&P Valve	H	500	688	875	1009	1195	1507	1326	1667

Slimline Diameter - 475mm							
Product Code	UIS60	UIS90	UIS120	UIS150	UIS170	UIS200	
Capacity (L)	60	90	120	150	170	200	
Height	A	714	977	1240	1505	1680	1950
Cold Inlet	B	174	174	174	174	174	174
Heating Flow	C	199	199	199	199	199	199
Return	D	239	239	279	279	359	359
Control Stat	E	309	309	349	349	429	429
Immersion	F	289	289	329	329	409	409
T&P Valve	H	501	788	1038	1306	1484	1751

Connection Sizes

3/4" Comp. | Hot Draw, Cold Feed, Sec. Return, Coil Conns.
Immersion
T&P Relief Valve

Please note, that 690mm calorifiers come with 1" hot outlet and cold feed, and a second immersion heater as standard.

Please note: These tapping heights are subject to change, are to be used as a guideline only